


HT¹⁸² TOPCon

Bifacial Series

590~610W

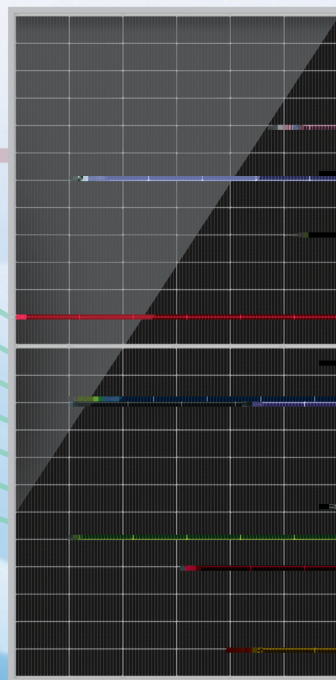

Main Features

N-TYPE TOPCON TECH

- Lower LID
- Excellent Low Irradiance

SMBB + NON-DESTRUCTIVE CUTTING

- Reduced Internal Current Loss
- Minimized Micro-Crack Impact

RESISTANT TO HARSH MARINE ENVIRONMENTS

- Strong Wind Resistance, Wave Impact Resistance, Salt Mist Resistance
- UV Aging Resistance, Superior

HIGH CONVERSION EFFICIENCY

- Up to 23.6%
- Bifaciality Rate Up to 80±5%


SUPERIOR POWER GENERATION PERFORMANCE

- Lower Operating Temperature

LOWER LEVELIZED COST OF ELECTRICITY

- Lower BOS and LCOE
- Higher ROI

Comprehensive Products and System Certificates

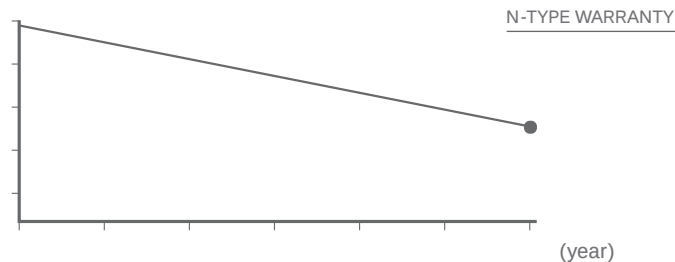

Munich RE

15 YEAR

Product Workmanship Warranty

30 YEAR

Linear Power Warranty

≤1%

First - year power attenuation

≤0.4%

Linear power attenuation



HONGYUAN GREEN ENERGY CO.,LTD.



Group Headquarter: Building 7, Changguangxi Wetland Park, Lihu Avenue, Binhu District, Wuxi City, Jiangsu Province, China



Tel:



E-mail: info@hysolar.com



Web: <https://www.hysolar.com>

